


## office & storage trailers



# **Smart Solutions For The Jobsite!**




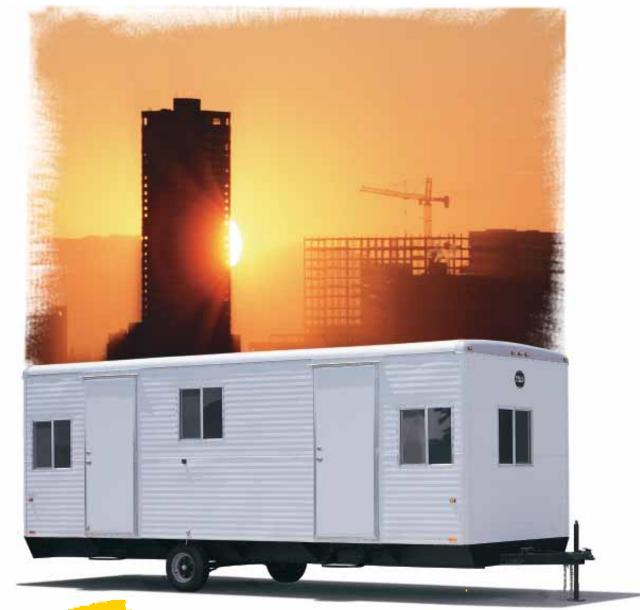







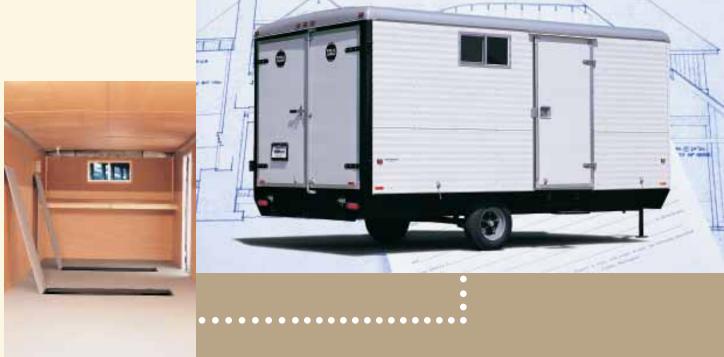





The Wells Cargo Work Wagon<sup>®</sup> is like having your shop right on the job site. It gives you plenty of room for storing tools, equipment and materials neatly and securely, all in one place.

The Work Wagon<sup>®</sup> is ideal for those large jobs with up to 1574 cu. ft. of work and storage space. The exclusive, patented underfloor storage compartment (with inside access) is designed to carry long, typically cumbersome material such as pipe, conduit, lumber or ladders.

## **SPECIFICATIONS**

Municipality of the superson with the superson w									
	737 V	67, 1	207, 1	81,	823 F	22 ×			~~
Body Length	12'0"	16'0"	20'0"	24'0"	16'0"	20'0"	24'0"	28'0"	32'0"
	12'0"	19'6"	20'0'	24 0	19'6"	20'0' 23'6"	24 0	200 31′6″	32'0 35'6″
Overall: Length Width	6'0"	93 <sup>1</sup> /4″	23 0 93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	23 0 93 <sup>1</sup> /4″	27 0 93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	33 0 93 <sup>1</sup> /4″
	8'2"	9374 9'6"	9374 9'6"	9374 9'6"	9374 9'6"	9374 9'6"	9374 9'6"	9374 9'6"	9374 9'6"
Height	8 2 11′9″	90 15′9″	90 19′9″	23'9"	90 15′9″	90 19′9″	23'9"	90 27′9″	9'0" 31'9"
Interior: Length									
Width Height	5′9″ 6′0″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″	7′6″ 6′6″
0									
Platform Height Number of Axles	30″	30″ 1	30″	30″ 1	30″ 2	30″ 2	30″ 2	30″ 2	30″ 2
			l Chuo i subst				_		
Axle Type	Straight	Straight	Straight	-	Straight	Straight	-	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	No 13″	Yes 14 <sup>1</sup> /2"	Yes 14 <sup>1</sup> /2"	Yes 14 <sup>1</sup> /2"	Yes 14 <sup>1</sup> /2″	Yes 14 <sup>1</sup> /2″	Yes 14 <sup>1</sup> /2"	Yes 14 <sup>1</sup> /2"	Yes 14 <sup>1</sup> /2"
Tire Size									
Load Range	C 5	D 5	D 5	D 5	D 5	D 5	D 5	D 5	D 5
Wheel Bolt Pattern		-	-	-		-	Ŭ	-	-
Hitch Ball Size	2"	2″	2″	2"	2″ 19″	2″	2″ 19″	2″ 19″	2″
Hitch to Top of Ball	15″	19″	19″	19"		19″			19″
Hitch Weight ( <i>Ib.</i> )	10-15%	10-15%	10-15%		10-15%	10-15%		10-15%	10-15%
Curb Weight (Ib.)	1360	2320	2600	2900	2620	2900	3200	3500	3800
Curbside Door: Width	N/A	36"	36"	36"	36"	36"	36"	36"	36"
Height	N/A	69″	69″	69″	69″	69″	69″	69″	69″
Rear Doors: Type	Single	Double	Double	Double	Double	Double	Double	Double	Double
Width	48″	82″	82″	82″	82″	82″	82″	82″	82″
Height	63"	69"	69"	69"	69"	69"	69″	69"	69″ 21/10″
Under Floor Storage Length	11'10"	15′10″	19′10″	23′10″	15′10″	19′10″	23′10″	27′10″	31′10″
Specifications Subject To	Single Axle				Tanden	n Axle			

Change Without Notice.

Work Wagon<sup>®</sup>

## Work Wagon<sup>®</sup>

## STANDARD FEATURES

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery\*
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step\*


- Underfloor Storage Compartment
- 3/4" Exterior Grade Plywood Floors
- 1/4" Plywood Interior Sidewall
- 1/4" Pegboard Tool Panel
- Slider Windows with Screens\*
- Drawing Board/Blueprint Table\*
- 30 AMP, 120-Volt Service Panel\*
- 120-Volt Interior Duplex Wall Receptacles\*
- 120-Volt Pull Chain Light Fixtures\*




404




## Work Wagon<sup>®</sup> Floor Plans



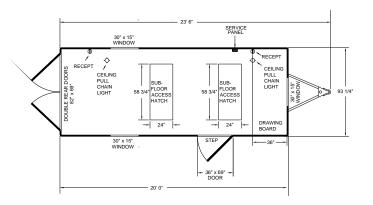


## Model WW1611 & WW1622


### Model WW2011 & WW2022

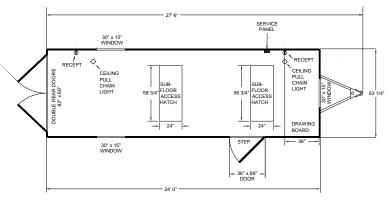

## Model WW2411 & WW2422

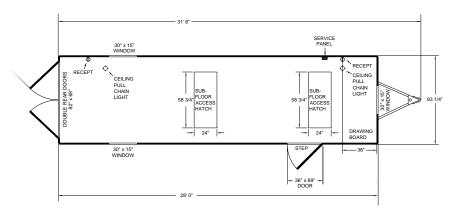

## Model WW2822

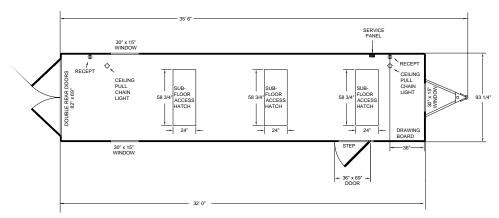

#### Model WW3222





The Wells Cargo **Office Wagon**<sup>®</sup> is a combination office and shop. It has everything you need to function efficiently at the job site.

Up front is a completely partitioned, well furnished office. Select from either 8 ft. or 12 ft. office space configurations. In back there's plenty of room for your tools, supplies and equipment including access to a full length sub-floor storage compartment.

## **SPECIFICATIONS**

	0141387	01134770	OWNER	OW JALLO	OW 312	01132120	
	- Fay	, <sup>9</sup> 77	12	<u>`</u> *	<u>`</u> ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	$\langle \dot{z} $	
	$\langle \cdot \rangle$	°⊗ ∕ °	なくて	$\sqrt[6]{6}$	なく、	60 / 6	な \
Pody Long		24'0"	24'0"	24'0"	24'0"	32'0"	32'0"
Overall:	ody Length Iverall: Length		24 0 27'6"	24 0	24 0 27'6″	32 0 35′6″	32'0"
overall.	Width	27′6″ 93 <sup>1</sup> /₄″	93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	93 <sup>1</sup> /4″	93 <sup>1</sup> / <sub>4</sub> "
	Height	10'6"	10′6″	10'6"	10'6"	73 /₄ 10′6″	10'6"
Interior:	Length	23'9"	23'9"	23'9"	23'9"	31′9″	31'9"
interior.	Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
	Height (Office)	7'0"	7'0″	7'0"	7'0″	7'0″	7'0″
	Height (Shop)	7'6"	7'6"	7'6"	7'6″	7'6″	7'6"
Platform H	-	30″	30″	30″	30″	30″	30"
Number of Axles		1	1	2	2	2	2
Axle Type		Straight	Straight	Straight	_ Straight	_	_
Suspension		Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)		Yes	Yes	Yes	Yes	Yes	Yes
Tire Size		14 <sup>1</sup> / <sub>2</sub> "	14 <sup>1</sup> / <sub>2</sub> "	14 <sup>1</sup> / <sub>2</sub> "			
Load Rang	e	D	D	D	D	D	D
Wheel Bolt Pattern		5	5	5	5	5	5
Hitch Ball	Size	2″	2″	2″	2″	2″	2″
Hitch to To	op of Ball	19″	19″	19″	19″	19″	19″
Hitch Weig	ght <i>(lb.)</i>	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weig	jht (Ib.)	3100	3200	3400	3500	4200	4300
Curbside E	Curbside Door: Width		36″	36″	36″	36″	36″
	Height	80″	80″	80″	80″	80″	80″
Rear Door	s:Type	Double	Double	Double	Double	Double	Double
Width		82″	82″	82″	82″	82″	82″
	Height	80″	80″	80″	80″	80″	80″
Under Floo	or Storage Length	23′10″	23′10″	23′10″	23′10″	31′10″	31′10″
Specificatio	ons Subject To						

Specifications Subject To Change Without Notice.

Single Axle Office Wagon®

#### Tandem Axle Office Wagon®

## **STANDARD FEATURES**

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- 3/4" Exterior Grade Plywood Floors

- 1/4" Plywood Interior Sidewall (shop area)
- 1/4" Pegboard Tool Panel (shop area)
- 1/4" Prefinished Paneling (office area)
- 1/4" White Vinyl Ceiling (office area)
- Floor, Wall & Ceiling Insulation (office area)
- Drawing Board/Blueprint Table (office area)
  Desk with File Cabinet (office area)
- Vinyl Linoleum Floors (office area)
- VIIIyi Linoleuni Floors (once alea)
- 120-Volt Fluorescent Light Fixture(s) (office area)
- 120-Volt Pull Chain Light Fixture (shop area)50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles


SPECOW/IN - 404

Office Wagon®


WELLS CARGO




# **Office Wagon® Floor Plans**

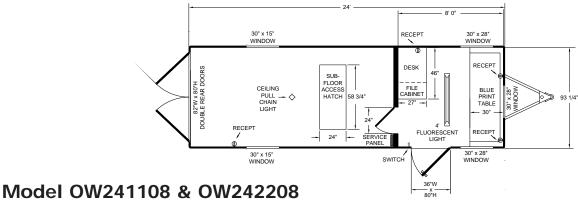


## Wodel 0W241108 & 0W242208

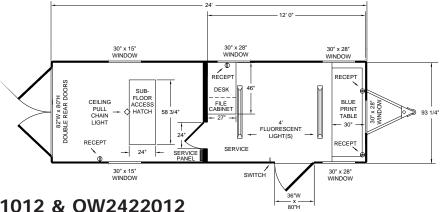

Model OW2411012 & OW2422012

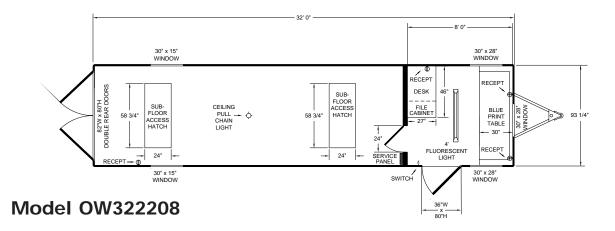

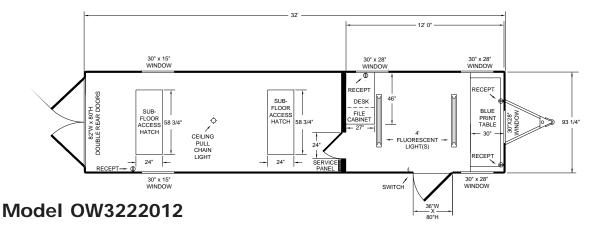

## 1-800-348-7553





**SPECIFICATIONS** 

The Wells Cargo **Field Office** is a complete office facility that can go with you behind any full size pick-up truck right to the job site. Built for years of trouble-free service, the unit features everything you need to operate just like you would at your permanent office. Several different layouts are available including one with a 1/2 bathroom.

# **Field Office**

	rono.	F030	K02.5	F030	£03 577		
		5. \ 72	$\gamma / \tilde{r}_{s}$	~ \ ~		2	
	$\backslash$	17 \	17 \	17 \	17	や/	
Body Leng	`	16'0"	20′0″	24′0″	26'0"	32'0"	)
Overall:	Length	19'6"	23'6"	27'6"	29'6"	35'6"	
	Width	93 <sup>1</sup> / <sub>4</sub> "	93 <sup>1</sup> /4″				
	Height	10′6″	10′6″	10'6"	10'6"	10'6"	
Interior:	Length	15′9″	19′9″	23'9"	25′9″	31′9″	
	Width	7′6″	7′6″	7′6″	7′6″	7′6″	
	Height	7′0″	7′0″	7′0″	7′0″	7′0″	
Platform	Height	30″	30″	30″	30″	30″	
Number of Axles		1	1	1	1	2	
Axle Type		Straight	Straight	Straight	Straight	Straight	
Suspensio	on	Spring	Spring	Spring	Spring	Spring	
Electric B	rakes (1 Axle)	Yes	Yes	Yes	Yes	Yes	
Tire Size		14 <sup>1</sup> /2"	14 <sup>1</sup> /2"	14 <sup>1</sup> /2"	14 <sup>1</sup> /2″	14 <sup>1</sup> /2"	
Load Range		D	D	D	D	D	
Wheel Bolt Pattern		5	5	5	5	5	
Hitch Ball		2″	2″	2″	2″	2″	
Hitch to To		19″	19″	19″	19″	19″	
Hitch Wei	-	10-15%	10-15%	10-15%	10-15%		
Curb Weig	-	2480	2850	3220	3400	4550	
Curbside		36″	36″	36″	36″	36″	
	Height	80″	80″	80″	80″	80″	
Under Flo	or Storage Length	15′10″	19′10″	23′10″	25′10″	31′10″	
Specifications Subject To Change Without Notice.		Single Axle			Tandem Axle		
change W		Field Office			Field Office		

## **STANDARD FEATURES**


- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- Breakaway Switch with Wet Cell Battery

- 3/4" Exterior Grade Plywood Floors
- 1/4" Prefinished Paneling
- 1/4" White Vinyl Ceiling
- Floor, Wall & Ceiling Insulation
- Drawing Board/Blueprint Table
- Desk with File Cabinet
- Vinyl Linoleum Floors
- 120-Volt Fluorescent Light Fixtures
- 50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles

404




# **Field Office Floor Plans**

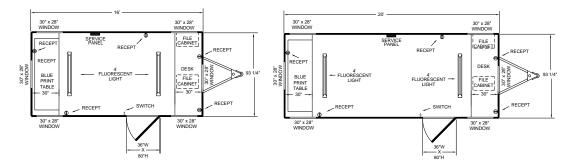


## Model FO1611


## Model FO2011




## Model FO2411

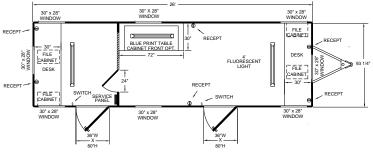


## Model FO2611

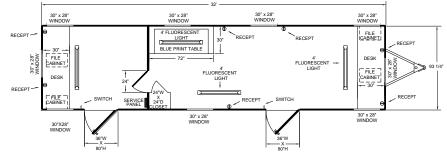

## Model FO3222

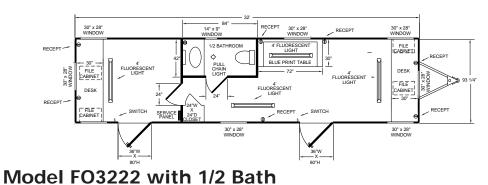





# **Field Office**



## Quality Construction — Always One Step Ahead





12 Volt Electrical System All circuits distributed from junction box inside trailer. Easy access to all circuitry. No hidden splices. SAE truck/trailer color coded wire.

**Exterior Lighting** Clearance lights, tail lights, brake lights, marker lights and turn indicators meet strict D.O.T. requirements. Molded wiring harness. Sealed beam tail lights with polycarbonate "Diamond Shell' lens. Easy replacement.



Aluminum Anti-Rack Cam Lock Commercial quality cast aluminum Cam Lock and stainless steel hasp deliver a long lasting, no-rust finish for the life of your trailer. Anti-Rack design (forked Cam with "T" shaped Keeper) forms a structural link between door header and footer reducing door movement, frame torque, and road vibration. Better seal compression to prevent moisture penetration.

Fold-Out Step

All side door locations include a convenient retractable 20" steel step. A special notched track assures easy use at the jobsite and secure storage during transit. Slip resistant step surface for safety.



**PLANT LOCATIONS** 

Elkhart, Indiana Waco, Texas

Phoenix, Arizona

Waycross Georgia Carbondale, Pennsylvania

Ogden, Utah

Solid Support Down The Road After you make the decision to buy a Wells Cargo, our commitment to you is not over. Our comprehensive 6-Year Warranty Program is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-ofmind you get knowing that your investment is protected by an established company with a solid reputation.









#### Wet Cell Battery

Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements. Low voltage indicator light. Up to 100 recharges.

#### Anodized Roof Cove

Extruded aluminum Roof Cove (with drip rail) provides extra body support and solid anchoring for roof and prefinished aluminum skin. Special anodizing process assures Roof Cove will maintain a "like-new" luster for years with minimal maintenance.

#### Patented Underfloor Storage Compartment

Unique design allows easy access from exterior fold-down door or from interior lift-up hatch. Great for storing lumber, pipe, conduit, and ladders. Keeps your supplies safe, secure, and protected from the elements.

#### **Corrosion Preventive Measures**

To ward off the damaging effects of rust a Wells Cargo chassis is protected with a laboratory tested, Corrosion Preventative Compound. All exposed steel is painted with a state-of-the-art process including both a primer & urethane topcoat for a smooth, long lasting finish. Also, a special corrosion resistant tape is applied between the steel frame and exterior aluminum skin to prevent electrolysis.



#### **CORPORATE OFFICE** 1503 W. McNaughton St. PO Box 728

Elkhart, IN 46515-0728 Phone: (574) 264-9661 Fax: (574) 264-5938 Web: www.wellscargo.com

#### AUTHORIZED WELLS CARGO DEALER

©Wells Cargo, Inc. 1999 Form JOBSITE699R503



