



WELLS CARGO


office & storage trailers



Smart Solutions For The Jobsite!



Office Wagon®

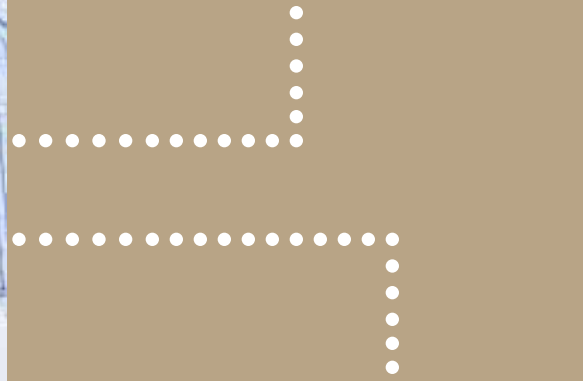

Work Wagon®





The Wells Cargo **Work Wagon®** is like having your shop right on the job site. It gives you plenty of room for storing tools, equipment and materials neatly and securely, all in one place.

The **Work Wagon®** is ideal for those large jobs with up to 1574 cu. ft. of work and storage space. The exclusive, patented underfloor storage compartment (with inside access) is designed to carry long, typically cumbersome material such as pipe, conduit, lumber or ladders.

SPECIFICATIONS

	WW1211	WW1611	WW2011	WW2411	WW1622	WW2022	WW2422	WW2822	WW3222
Body Length	12'0"	16'0"	20'0"	24'0"	16'0"	20'0"	24'0"	28'0"	32'0"
Overall: Length	15'0"	19'6"	23'6"	27'6"	19'6"	23'6"	27'6"	31'6"	35'6"
Width	6'0"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"
Height	8'2"	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"	9'6"
Interior: Length	11'9"	15'9"	19'9"	23'9"	15'9"	19'9"	23'9"	27'9"	31'9"
Width	5'9"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height	6'0"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
Platform Height	30"	30"	30"	30"	30"	30"	30"	30"	30"
Number of Axles	1	1	1	1	2	2	2	2	2
Axle Type	Straight	Straight	Straight	Straight	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tire Size	13"	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"
Load Range	C	D	D	D	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"	2"	2"	2"	2"
Hitch to Top of Ball	15"	19"	19"	19"	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	1360	2320	2600	2900	2620	2900	3200	3500	3800
Curbside Door: Width	N/A	36"	36"	36"	36"	36"	36"	36"	36"
Height	N/A	69"	69"	69"	69"	69"	69"	69"	69"
Rear Doors: Type	Single	Double	Double	Double	Double	Double	Double	Double	Double
Width	48"	82"	82"	82"	82"	82"	82"	82"	82"
Height	63"	69"	69"	69"	69"	69"	69"	69"	69"
Under Floor Storage Length	11'10"	15'10"	19'10"	23'10"	15'10"	19'10"	23'10"	27'10"	31'10"

Specifications Subject To Change Without Notice.



Single Axle Work Wagon®



Tandem Axle Work Wagon®


STANDARD FEATURES

- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery*
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step*
- Underfloor Storage Compartment
- 3/4" Exterior Grade Plywood Floors
- 1/4" Plywood Interior Sidewall
- 1/4" Pegboard Tool Panel
- Slider Windows with Screens*
- Drawing Board/Blueprint Table*
- 30 AMP, 120-Volt Service Panel*
- 120-Volt Interior Duplex Wall Receptacles*
- 120-Volt Pull Chain Light Fixtures*


*Not included on model WW1211




Work Wagon® Floor Plans

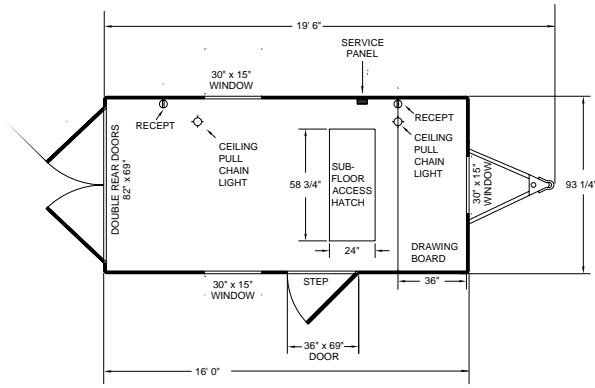


Model WW1611 & WW1622

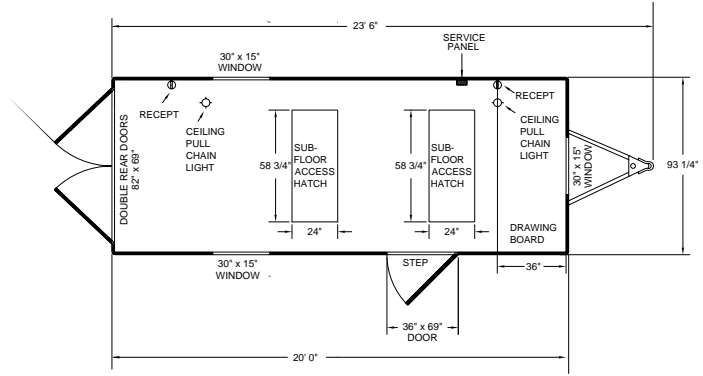


Model WW2011 & WW2022

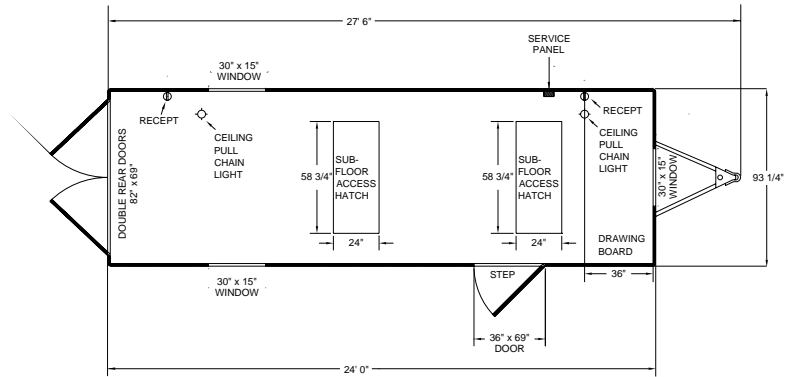

Model WW2411 & WW2422

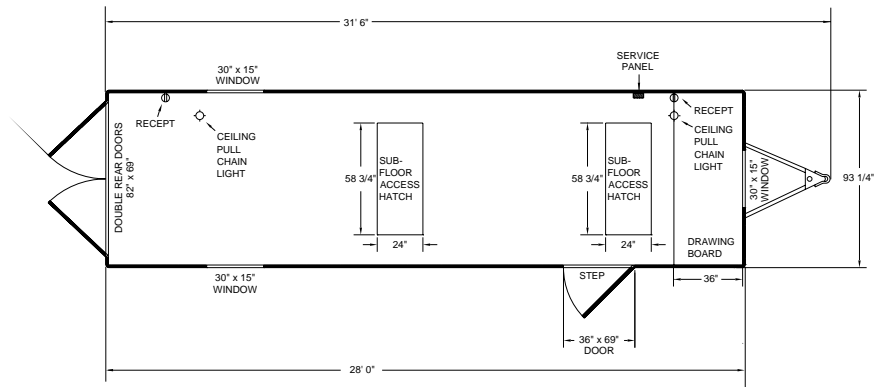

Model WW2822

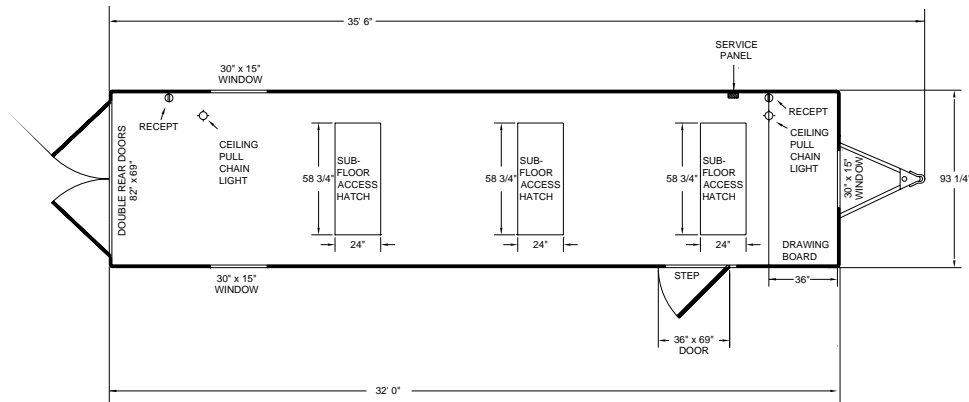

Model WW3222



The Wells Cargo **Office Wagon®** is a combination office and shop. It has everything you need to function efficiently at the job site.

Up front is a completely partitioned, well furnished office. Select from either 8 ft. or 12 ft. office space configurations. In back there's plenty of room for your tools, supplies and equipment including access to a full length sub-floor storage compartment.

SPECIFICATIONS

	OW241108	OW2411012	OW242208	OW2422012	OW322208	OW3222012
Body Length	24'0"	24'0"	24'0"	24'0"	32'0"	32'0"
Overall:						
Length	27'6"	27'6"	27'6"	27'6"	35'6"	35'6"
Width	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"	93 1/4"
Height	10'6"	10'6"	10'6"	10'6"	10'6"	10'6"
Interior:						
Length	23'9"	23'9"	23'9"	23'9"	31'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Height (Office)	7'0"	7'0"	7'0"	7'0"	7'0"	7'0"
Height (Shop)	7'6"	7'6"	7'6"	7'6"	7'6"	7'6"
Platform Height	30"	30"	30"	30"	30"	30"
Number of Axles	1	1	2	2	2	2
Axle Type	Straight	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	Yes	Yes	Yes	Yes	Yes	Yes
Tire Size	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"	14 1/2"
Load Range	D	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"	2"
Hitch to Top of Ball	19"	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	3100	3200	3400	3500	4200	4300
Curbside Door:						
Width	36"	36"	36"	36"	36"	36"
Height	80"	80"	80"	80"	80"	80"
Rear Doors:						
Type	Double	Double	Double	Double	Double	Double
Width	82"	82"	82"	82"	82"	82"
Height	80"	80"	80"	80"	80"	80"
Under Floor Storage Length	23'10"	23'10"	23'10"	23'10"	31'10"	31'10"

Specifications Subject To Change Without Notice.



Single Axle Office Wagon®




Tandem Axle Office Wagon®

STANDARD FEATURES


- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Breakaway Switch with Wet Cell Battery
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- 3/4" Exterior Grade Plywood Floors
- 1/4" Plywood Interior Sidewall (shop area)
- 1/4" Pegboard Tool Panel (shop area)
- 1/4" Prefinished Paneling (office area)
- 1/4" White Vinyl Ceiling (office area)
- Floor, Wall & Ceiling Insulation (office area)
- Drawing Board/Blueprint Table (office area)
- Desk with File Cabinet (office area)
- Vinyl Linoleum Floors (office area)
- 120-Volt Fluorescent Light Fixture(s) (office area)
- 120-Volt Pull Chain Light Fixture (shop area)
- 50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles




Office Wagon® Floor Plans

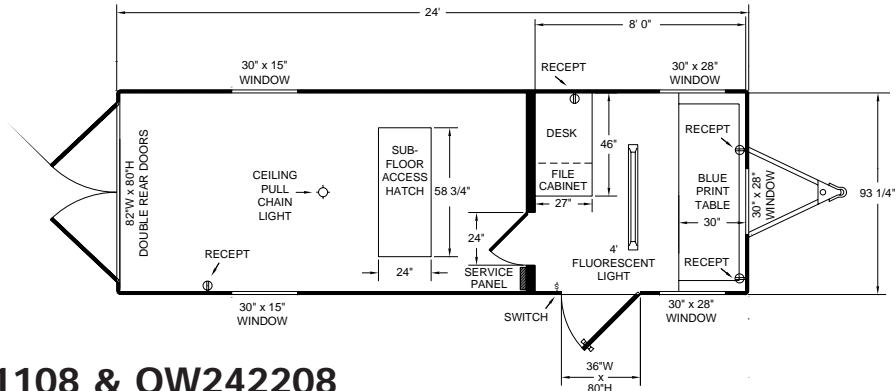


Model OW241108 & OW242208

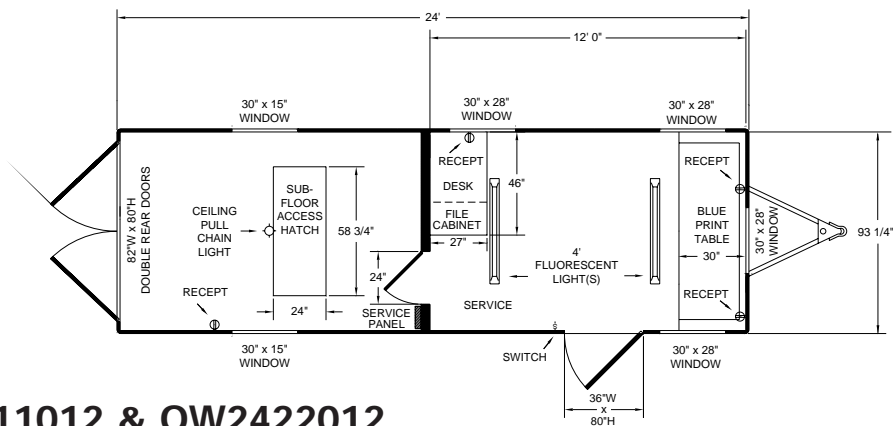

Model OW2411012 & OW2422012

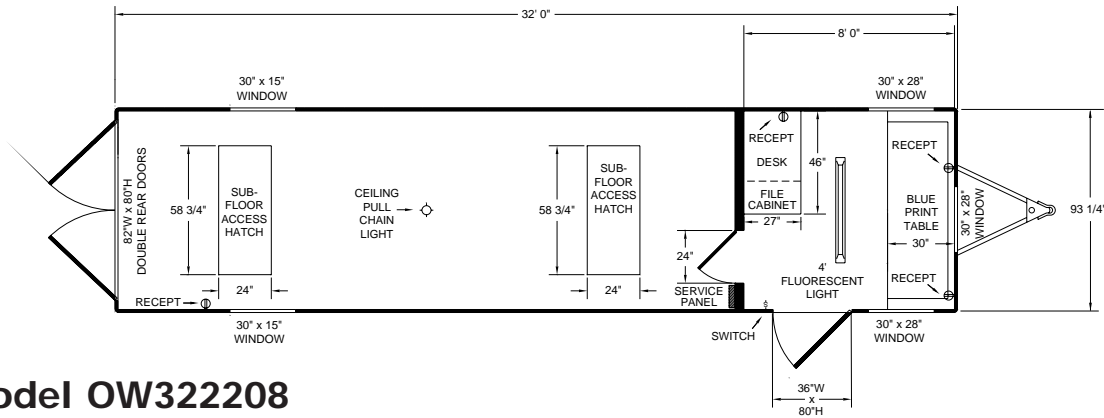

Model OW322208

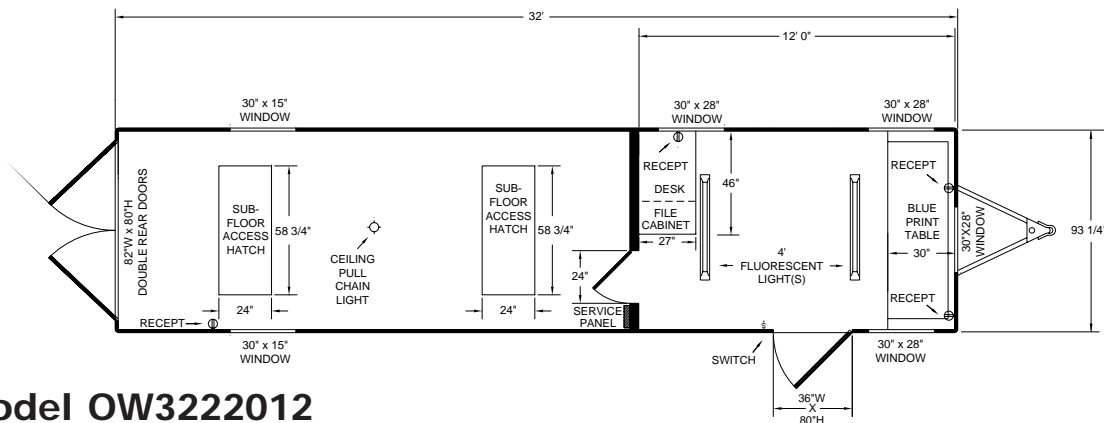

Model OW3222012



The Wells Cargo **Field Office** is a complete office facility that can go with you behind any full size pick-up truck right to the job site. Built for years of trouble-free service, the unit features everything you need to operate just like you would at your permanent office. Several different layouts are available including one with a 1/2 bathroom.

SPECIFICATIONS

	FO1611	FO2011	FO2411	FO2611	FO3222
Body Length	16'0"	20'0"	24'0"	26'0"	32'0"
Overall:					
Length	19'6"	23'6"	27'6"	29'6"	35'6"
Width	93 ¹ / ₄ "	93 ¹ / ₄ "	93 ¹ / ₄ "	93 ¹ / ₄ "	93 ¹ / ₄ "
Height	10'6"	10'6"	10'6"	10'6"	10'6"
Interior:					
Length	15'9"	19'9"	23'9"	25'9"	31'9"
Width	7'6"	7'6"	7'6"	7'6"	7'6"
Height	7'0"	7'0"	7'0"	7'0"	7'0"
Platform Height	30"	30"	30"	30"	30"
Number of Axles	1	1	1	1	2
Axle Type	Straight	Straight	Straight	Straight	Straight
Suspension	Spring	Spring	Spring	Spring	Spring
Electric Brakes (1 Axle)	Yes	Yes	Yes	Yes	Yes
Tire Size	14 ¹ / ₂ "	14 ¹ / ₂ "	14 ¹ / ₂ "	14 ¹ / ₂ "	14 ¹ / ₂ "
Load Range	D	D	D	D	D
Wheel Bolt Pattern	5	5	5	5	5
Hitch Ball Size	2"	2"	2"	2"	2"
Hitch to Top of Ball	19"	19"	19"	19"	19"
Hitch Weight (lb.)	10-15%	10-15%	10-15%	10-15%	10-15%
Curb Weight (lb.)	2480	2850	3220	3400	4550
Curbside Door(s):					
Width	36"	36"	36"	36"	36"
Height	80"	80"	80"	80"	80"
Under Floor Storage Length	15'10"	19'10"	23'10"	25'10"	31'10"

Specifications Subject To Change Without Notice.



Single Axle Field Office




Tandem Axle Field Office

STANDARD FEATURES


- Positive Lock Ball Coupler
- Jack Ram Hoist with Sand Pad
- Safety Chains to D.O.T. Regulations
- Fiberglass End Caps
- CPC Undercoating on complete chassis
- .030 Exterior Aluminum (11 colors)
- Non-corrosive Screw Fasteners
- 20" Fold-Up Step
- Underfloor Storage Compartment
- Slider Windows with Screens
- Breakaway Switch with Wet Cell Battery
- 3/4" Exterior Grade Plywood Floors
- 1/4" Prefinished Paneling
- 1/4" White Vinyl Ceiling
- Floor, Wall & Ceiling Insulation
- Drawing Board/Blueprint Table
- Desk with File Cabinet
- Vinyl Linoleum Floors
- 120-Volt Fluorescent Light Fixtures
- 50 AMP, 120-Volt Service Panel
- 120-Volt Interior Duplex Wall Receptacles




Field Office Floor Plans

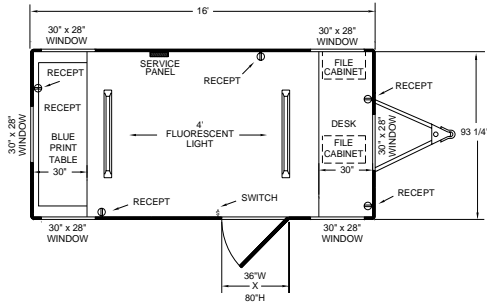


Model F01611

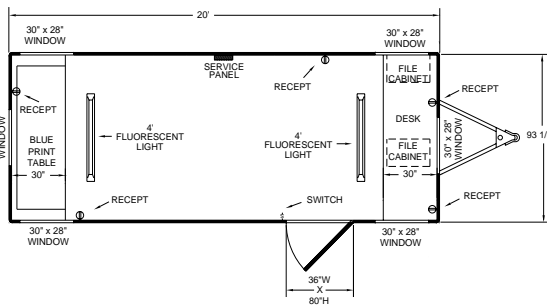


Model F02011

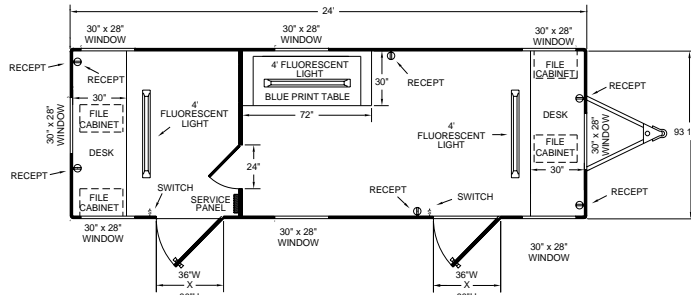


Model F02411

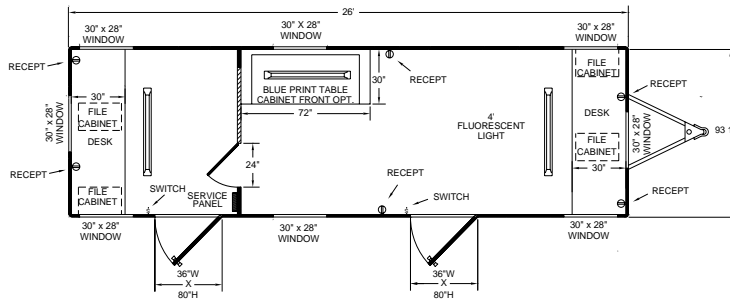


Model F02611

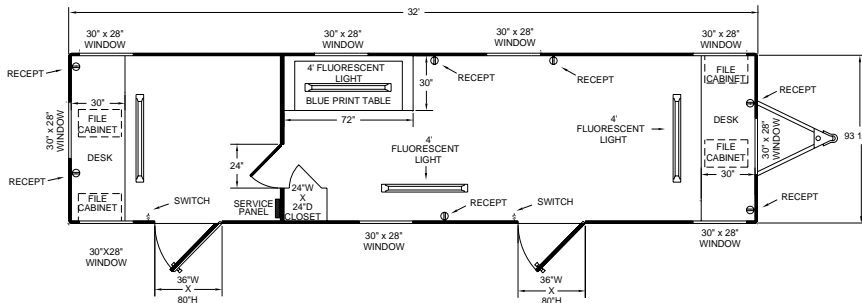


Model F03222

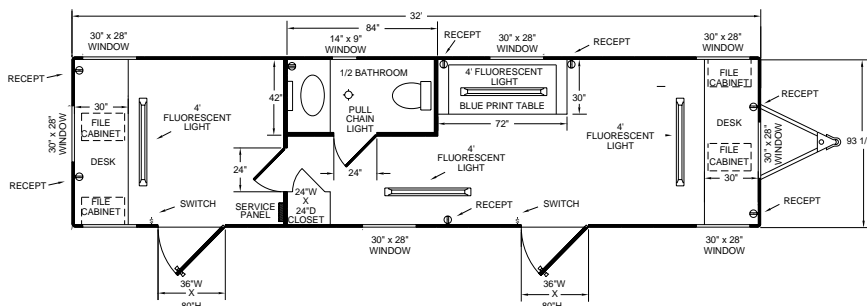

Model F03222 with 1/2 Bath

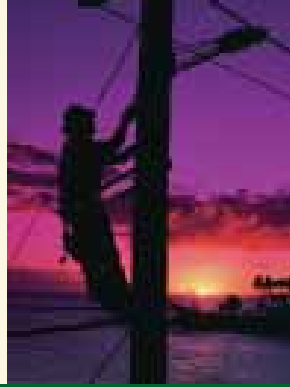

Field Office

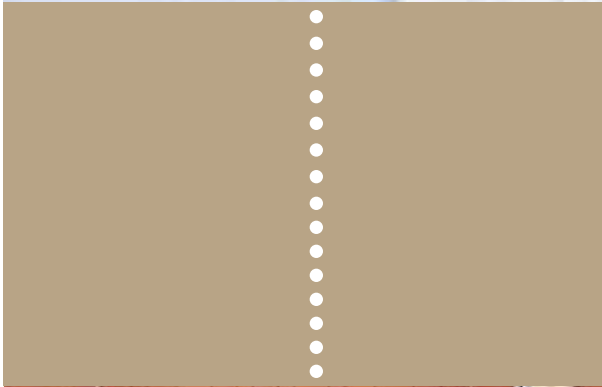

Quality Construction — Always One Step Ahead



12 Volt Electrical System

All circuits distributed from junction box inside trailer. Easy access to all circuitry. No hidden splices. SAE truck/trailer color coded wire.



Wet Cell Battery

Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements. Low voltage indicator light. Up to 100 recharges.



Exterior Lighting

Clearance lights, tail lights, brake lights, marker lights and turn indicators meet strict D.O.T. requirements. Molded wiring harness. Sealed beam tail lights with polycarbonate "Diamond Shell" lens. Easy replacement.



Anodized Roof Cove

Extruded aluminum Roof Cove (with drip rail) provides extra body support and solid anchoring for roof and prefinished aluminum skin. Special anodizing process assures Roof Cove will maintain a "like-new" luster for years with minimal maintenance.



Aluminum Anti-Rack Cam Lock

Commercial quality cast aluminum Cam Lock and stainless steel hasp deliver a long lasting, no-rust finish for the life of your trailer. Anti-Rack design (forked Cam with "T" shaped Keeper) forms a structural link between door header and footer reducing door movement, frame torque, and road vibration. Better seal compression to prevent moisture penetration.



Patented Underfloor Storage Compartment

Unique design allows easy access from exterior fold-down door or from interior lift-up hatch. Great for storing lumber, pipe, conduit, and ladders. Keeps your supplies safe, secure, and protected from the elements.



Fold-Out Step

All side door locations include a convenient retractable 20" steel step. A special notched track assures easy use at the jobsite and secure storage during transit. Slip resistant step surface for safety.



Corrosion Preventive Measures

To ward off the damaging effects of rust a Wells Cargo chassis is protected with a laboratory tested, Corrosion Preventative Compound. All exposed steel is painted with a state-of-the-art process including both a primer & urethane topcoat for a smooth, long lasting finish. Also, a special corrosion resistant tape is applied between the steel frame and exterior aluminum skin to prevent electrolysis.



Solid Support Down The Road

After you make the decision to buy a Wells Cargo, our commitment to you is not over. Our comprehensive 6-Year Warranty Program is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-of-mind you get knowing that your investment is protected by an established company with a solid reputation.

**Never Look Back
Warranty Program**



PLANT LOCATIONS

Elkhart, Indiana
Waco, Texas
Ogden, Utah
Phoenix, Arizona
Waycross, Georgia
Carbondale, Pennsylvania



CORPORATE OFFICE

1503 W. McNaughton St.
PO Box 728
Elkhart, IN 46515-0728
Phone: (574) 264-9661
Fax: (574) 264-5938
Web: www.wellscargo.com

AUTHORIZED WELLS CARGO DEALER